


# FILM PET MAGNETO 350MIC UNIVERSAL



## Description:

- White matte PET bonded to isotropic NM magnet sheeting, compatible for (eco) solvent, Latex and UV curable printing.
- NM magnet series is made of halogen free formula, meeting higher environmental requirements. Permanent magnetic property and antirust, it is workable on iron or steel, easy to apply, remove and change without residue.
- Premium PET base, good weather resistance, excellent for durable indoor display.
- Working condition: temperature 15°C to 30°C, and relative humidity 30% to 60%.
- Application condition: temperature change is within 40°C daily.
- Storage condition: closed preserve avoiding sunlight, in temperature 10°C to 35°C, relative humidity 20% to 70%
- Shelf life: 12 months under storage condition. Unfinished material should be seal-packed, and used up within one month.

CHARACTERISTICS	MEASUREMENTS
Thickness	350mic
Weight	815 g/m2
Whiteness	[80, 90]
Gloss 60°	[3, 8]
Opacity	100%
Water resistance	Medium-high
Pull Strength	[8, 10] g/cm2
Gauss	[120, 150] Gs

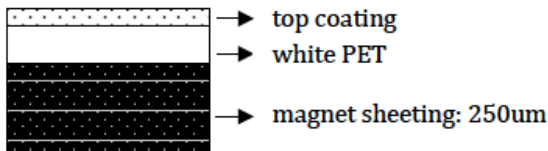

## Available in the shop online:

- PL708000 - PET Magneto 350mic Universal 0,61x20m
- PL708010 - PET Magneto 350mic Universal 1,07x20m
- PL708020 - PET Magneto 350mic Universal 1,27x20m
- PL708030 - PET Magneto 350mic Universal 1,52x20m

